

## Kerek búvónyílás központi zárral

Round manhole with central closure Runde

Klapptür, Schliesst in der Mitte


mod. **6026 N**

### Visszatartásmentes fedél

Retention free cover Freie

Entleerung Deckel

AISI 304/L - 316/L

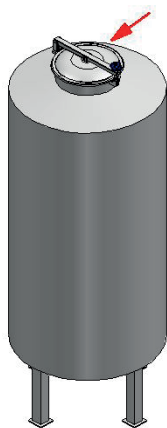

- Kragen - Frame - **Keret** ① ST  
Deckel - Cover - **Fedél** ② MR  
Dichtung - Gasket - **Tömítés** ③  
Handgriff - Handwheel - **Zárótekerő** ④  
Arm - Arm - **Kar** ⑤

| MOD.       | DN  | Di  | A | B | C   | D   | E   | F   | P.max<br>bar | Vacuum<br>bar |
|------------|-----|-----|---|---|-----|-----|-----|-----|--------------|---------------|
| 6026 N - 1 | 400 | 400 | 3 | 2 | 100 | 250 | 474 | 515 | 0.01         | -0.7          |
| 6026 N - 2 | 500 | 500 | 3 | 2 | 100 | 250 | 544 | 625 | 0.01         | -0.5          |
| 6026 N - 3 | 600 | 500 | 3 | 2 | 100 | 250 | 640 | 715 | 0.01         | -0.5          |

P.Max : Maximális üzemi nyomás -20°C / +50°C-ig  
Maximum working pressure to -20°C / +50°C

