


| <b>53600</b> |                                                   |          |          |          |          |  |                |           |
|--------------|---------------------------------------------------|----------|----------|----------|----------|--|----------------|-----------|
| <b>DN</b>    |                                                   | <b>A</b> | <b>B</b> | <b>D</b> | <b>L</b> |  | <b>Rd x s</b>  | <b>kg</b> |
|              |                                                   |          |          |          |          |  | <b>DIN 405</b> |           |
| <b>25</b>    |                                                   | 44,5     | 60,5     | 26       | 278,5    |  | 52x1/6"        | 1,75      |
| <b>32</b>    |                                                   | 60       | 61       | 32       | 275      |  | 58x1/6"        | 2,05      |
| <b>40</b>    |                                                   | 63       | 69,5     | 38       | 340      |  | 65x1/6"        | 2,81      |
| <b>50</b>    |                                                   | 67       | 70       | 50       | 351      |  | 78x1/6"        | 5,12      |
| <b>65</b>    |                                                   | 70,5     | 86       | 66       | 397      |  | 95x1/6"        | 8,9       |
|              |                                                   |          |          |          |          |  |                |           |
|              |                                                   |          |          |          |          |  |                |           |
|              |                                                   |          |          |          |          |  |                |           |
|              |                                                   |          |          |          |          |  |                |           |
|              | Range, Reichweite A) 0,2 – 5 bar<br>B) 3 – 10 bar |          |          |          |          |  |                |           |
|              |                                                   |          |          |          |          |  |                |           |

## Biztonsági sarokszelep

**mod.53600;53620**

Biztonsági sarokszelep G - G 90°

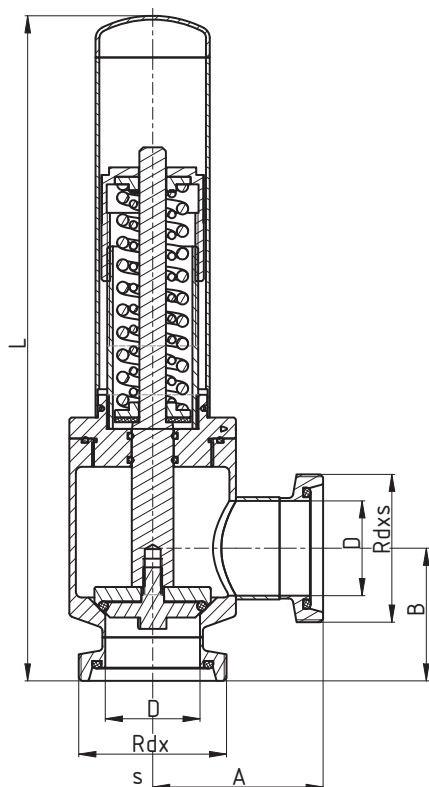

### 53620

| DN | A                                | B    | D  | L     | Rd x s         | kg   |
|----|----------------------------------|------|----|-------|----------------|------|
|    |                                  |      |    |       | <b>DIN 405</b> |      |
| 25 | 66,5                             | 60,5 | 26 | 278,5 | 52x1/6"        | 1,8  |
| 32 | 82                               | 61   | 32 | 275   | 58x1/6"        | 2,1  |
| 40 | 85                               | 69,5 | 38 | 340   | 65x1/6"        | 2,82 |
| 50 | 90                               | 70   | 50 | 351   | 78x1/6"        | 5,3  |
| 65 | 95,5                             | 86   | 66 | 397   | 95x1/6"        | 9    |
|    |                                  |      |    |       |                |      |
|    |                                  |      |    |       |                |      |
|    |                                  |      |    |       |                |      |
|    |                                  |      |    |       |                |      |
|    | Range, Reichweite A) 0,2 – 5 bar |      |    |       |                |      |
|    | B) 3 – 10 bar                    |      |    |       |                |      |