


**Lazakarima (régi szabvány DIN 2642)
PN10, rozsdamentes, ipari**

Mod.EN1092-4

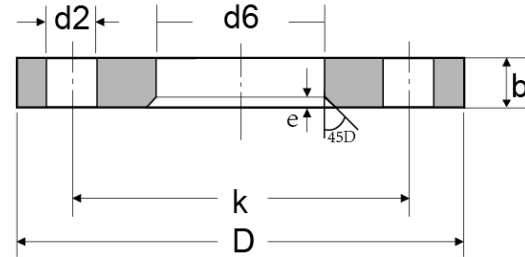

DN	e (mm)	Csav. száma (db)	kg	d1 (mm)	D (mm)	d6 (mm)	b (mm)	k (mm)	d2 (mm)
10	3	4	0.599	14	90	16	14	60	14
10	3	4	0.599	17,2	90	19	14	60	14
15	3	4	0.68	20	95	22	14	65	14
15	3	4	0.68	21,3	95	24	14	65	14
20	3	4	0.806	25	105	28	14	75	14
20	3	4	0.806	26,9	105	30	14	75	14
25	4	4	1.11	30	115	33	16	85	14
25	4	4	1.11	33,7	115	36	16	85	14
32	4	4	1.64	38	140	42	16	100	18
32	4	4	1.64	42,4	140	46	16	100	18
40	4	4	1.86	44,5	150	50	16	110	18
40	4	4	1.86	48,3	150	54	16	110	18
50	5	4	2.2	57	165	62	16	125	18
50	5	4	2.2	60,3	165	65	16	125	18
65	5	4	2.62	76,1	185	81	16	145	18
80	5	8	3.32	88,9	200	94	18	160	18
100	5	8	3.67	108	220	113	18	180	18
100	5	8	3.67	114,3	220	119	18	180	18
125	5	8	4.54	133	250	138	18	210	18
125	5	8	4.54	139,7	250	145	18	210	18
150	5	8	5.6	159	285	164	18	240	18
150	5	8	5.6	168,3	285	173	18	240	22
200	5	8	7.46	219,1	340	225	20	295	22
250	5	12	10.3	267	395	273	22	350	22
250	5	12	10.3	273	395	279	22	350	22
300	5	12	14	323,9	445	329	26	400	22
350	6	16	18.5	355,6	505	362	28	460	22
350	6	16	18.5	368	505	374	28	460	22
400	6	16	25	406,4	565	413	32	515	26
400	6	16	25	419	565	426	32	515	26
500	6	20	37	508	670	517	38	620	26
600	7	20	56.3	610	780	618	44	725	30
700	7	24	80.4	711	895	721	50	840	30
800	7	24	113.2	813	1015	824	56	950	30